TANK LEVEL GAUGES Model Numbers:

5000555 Mechanical 5000500 Pneumatic



WATER PRODUCTS

RAINWATER ACCESSORIES

PRODUCT DESCRIPTION

Simple and reliable water level indicators for domestic rainwater tanks.

APPLICATIONS

Ideal for :-

- Domestic rainwater systems
- Water level indicators in sumps or pits
- Above and below ground rainwater tanks

FEATURES & BENEFITS

00

Tank level gauges allow you to keep a close eye on your precious water stores without providing access for vermin or light to enter your water storage tank.

Mechanical tank mounted gauge provides a simple and reliable indication of the height in centimetres of the water that you have remaining in your water storage tank.

Pneumatic wall mount gauges provide a remote indication of the height of the water that you have remaining in your water storage tank. Measurement increments are in percentage of full %. Both gauges are simple to install and adjust to ensure an accurate level reading.

Long life corrosion resistant internal components and non contaminating water contact components.



OPERATING LIMITS

Depth measurement	
Mechanical gauge	0 - 1.5m
	or 0 - 2.5m
Pneumatic gauge	1 - 3.0m
Maximum distance fro	m tank
Mechanical gauge	Must be
	tank mounted
Pnuematic gauge	Comes with
	capillary hose
	ndable to 50m
Maximum water	
	50°C
temperature	30 C
Minimum water	
temperature	1°C
Maximum ambient	
temperature	50°C
temperature	50 C
Mounting hole	
Mechanical gauge	47mm
	threaded
Pneumatic gauge	5mm for
	capillary tube

TECHNICAL SPECIFICATIONS

MATERIALS OF CONSTRUCTION

PART

Mechanical gauge Gauge body

Guuge bouy
Screen
Tank probe
Cord
Weight
Oring

Pnuematic gauge


Gauge body Screen Capillary tube ABS Polycarbonate Polyethylene Nylon Water filled polypropylene Nitrile rubber


MATERIAL

ABS

Polycarbonate PVC

DIMENSIONS

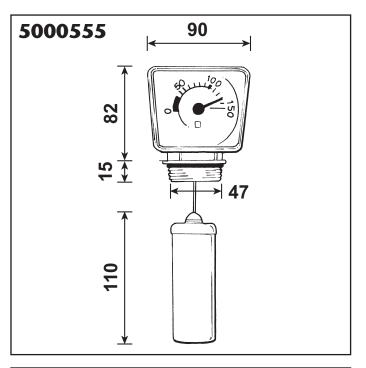

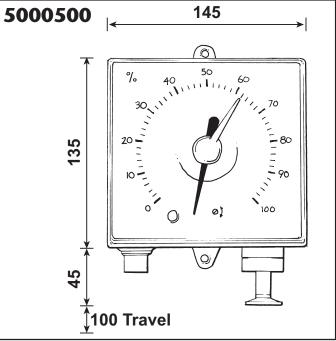

All dimensions in mm unless otherwise stated.

This literature is not a complete guide to product usage. Further information is available from your Davey dealer, Davey Customer Service Centre and from the relevant product Installation and Operating Instructions. This data sheet must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. ® Davey and RainBank are registered trademarks of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2006.



WATER PRODUCTS

Davey Water Products Pty Ltd International Member of the GUD Group ABN 18 066 327 517 Head Office and Manufacturing

6 Lakeview Drive, Scoresby, Australia 3179 Ph: +61 3 9730 9222 +61 3 9753 4100 Fax:

Website: davey.com.au **Customer Service Centre** Ph: 1300 367 866 Fax: 1300 369 119 F-mail: sales@davey.com.au Interstate Offices Sydney • Brisbane • Adelaide Perth • Townsville

6 Lakeview Drive, Scoresby, Australia 3179 Ph: +61 3 9730 9121 Fax: +61 3 9753 4248 E-mail: export@davey.com.au

Germany Kantstrasse 53,

 Kantsulasse 55,

 04275 Leipzig

 Ph:
 +49 341 301 0412

 Fax:
 +49 341 301 0413
E-mail: akrenz@daveyeurope.com



New Zealand

2 Rothwell Avenue. North Harbour, Auckland 1330 Ph: +64 9 914 3680 Fax: +64 9 914 3685 Website: daveynz.co.nz E-mail: sales@daveynz.co.nz

USA

Davey Pumps Inc. 1005 N. Commons Drive Aurora, Illinois 60504 +1 630 898 6976 +1 630 851 7744 Ph: Fax: Website: daveyusa.com E-mail: sales@daveyusa.com