


# AMIAD MANUAL STEEL FILTERS

For flow rates up to 1000 m<sup>3</sup>/h



- Corrosive Resistant: Phosphate pre-treated, polyester coated steel (Armadillo Armor Coating), or 316 stainless steel housings.
- Filtration degrees available from 3500 to 50 micron.
- Filter elements in 316 stainless steel or plastic discs.
- No tools required for maintenance.
- Meets ISO 9001 standards.
- Optional turboclean feature provides for automatic cleaning of screen elements.
- Pressure check points for ease of determining filter cake build up.
- Various connections available to meet all international requirements.
- All filters are rated to 10 bar.

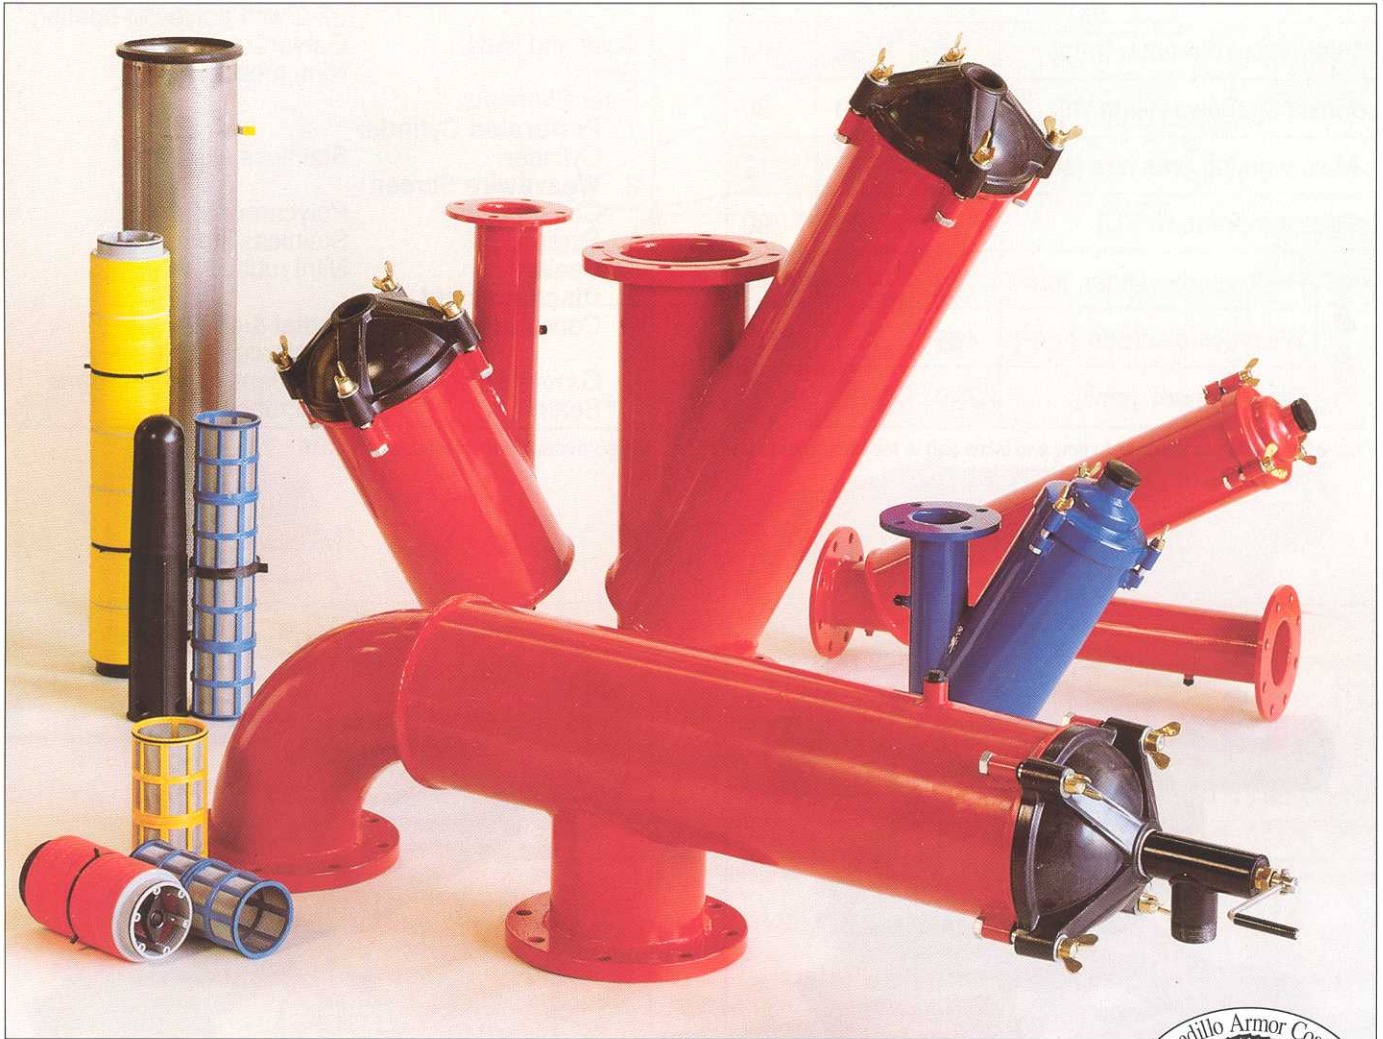



# 2" - 4" Steel Filters for Flow Rates up to 80 m<sup>3</sup>/h

## Technical Specifications

Filter model	2"	3"	4"	
Inlet/Outlet diameter [mm]	50	80	100	
Maximum flow rate [m <sup>3</sup> /h]	25	50	80	
Max. working pressure [bar]	10	10	10	
Max. temperature [°C]	90	90	90	
Filter Area	Perforated cylinder [cm <sup>2</sup> ]	700	1430	2175
	Weavewire screen [cm <sup>2</sup> ]	465	930	1850
	Disc element [cm <sup>2</sup> ]	790	1700	2600

Filter area: Total area exposed to flow and takes part in the filtering process.




## Construction Materials

Housing and Lid:	Phosphate pre-treated steel 37-2 with polyester coating.*
Bolts and Nuts:	Galvanized steel*
Seals:	Nitril rubber
Filter Elements:	
1. <b>Perforated Cylinder</b>	
Cylinder:	Stainless steel 316
2. <b>Weavewire Screen</b>	
Construction:	Polycarbonate
Screen:	Stainless steel 316
Seals:	Nitril rubber
3. <b>Discs Element</b>	
Construction:	Acetal & glass
Grooved discs:	Reinforced polyester
Seals:	High density polyethylene
	Nitril rubber

\* Also available in stainless steel 316.



## Pressure Loss Graphs

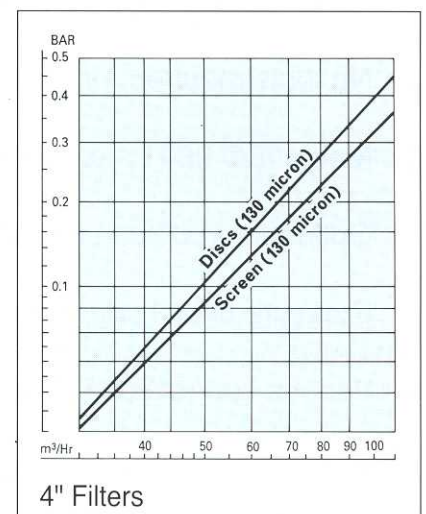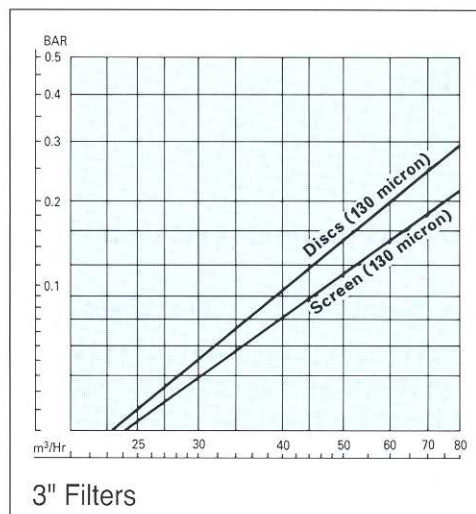
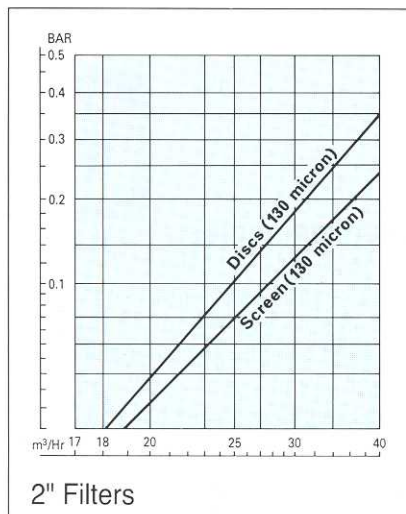


## Dimensions and Weight


Filter Size	Filter Model	Cat. No.	Inlet / Outlet Connections	Weight [kg]		Dimensions [mm]					Drg. No.
				Screen	Discs	A	B	C	D	E	
50 mm	2" In-line	02-020	Thread	7.3	8.1	420	-	550	290	380	1
50 mm	2" In-line	02-020	Flange	10.5	11.3	460	-	550	343	430	2
80 mm	3" In-line	02-030	Thread	13.6	15.2	545	620*	1000	410	580	1
80 mm	3" In-line	02-030	Flange	16.6	18.2	495	605	970	457	630	2
100 mm	4" In-line	02-040	Flange	27.5	30.0	800	830	1430	600	900	2

\* Refer to Drawing No. 2

Dimensions subject to change without notice, apply for certified drawings.

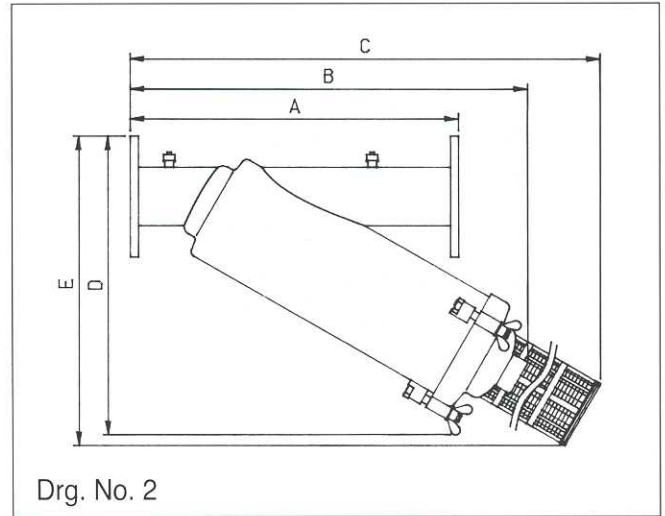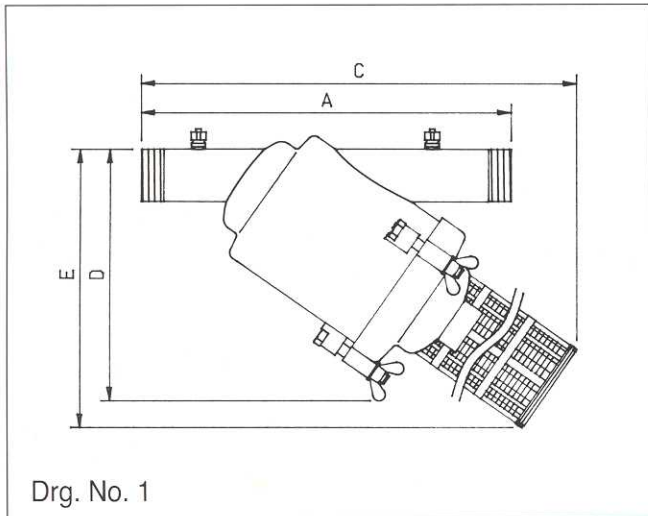

## Filtration Elements

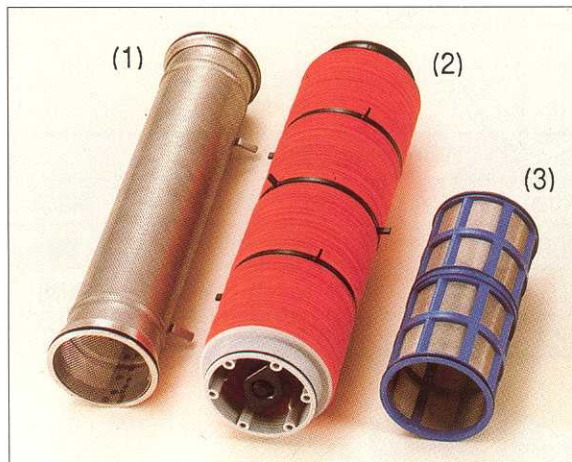

## How to Order

02-	filter type A	design B	kind C	material D,E	connection F	element G	filtration degree XXX
	2" - 02 3" - 03 4" - 04	Y-type - 0 L-type - 1 Super - 2		steel, red - 11 steel, blue - 12 steel, rubber - 13 stainless steel - 24	BR - 00 US - 10 EU - 20 JIS - 41 NPT - 50 VIC - 90	w/o screen - 000 50μ - 005 80μ - 008 100μ - 010 130μ - 013 200μ - 020 250μ - 025 300μ - 030 500μ - 050 800μ - 080 1500μ - 150 2500μ - 250 3500μ - 350	
				standard - 0 high pressure - 1	perforated - 0 weavewire - 1 turboclean - 2 autoflush - 3 discs - 7		

## Filtration Degrees

Code	Perforated Cylinder (1)				Weavewire Screen (3)							Grooved Disc Element (2)			
	Brown	Purple	Orange	Grey	Green	Blue	White	Red	Yellow	Black	Orange	Brown	Purple	Red	Yellow
Micron	3500	2500	1500	800	500	300	200	130	100	80	50	250	180	130	100
MM	3.5	2.5	1.5	0.8	0.5	0.3	0.2	0.13	0.1	0.08	0.05	0.25	0.18	0.13	0.1
Mesh	4	6	10	20	30	50	75	120	155	200	300	60	80	120	155



# 4"S - 8" Steel Filters for Flow Rates up to 300 m<sup>3</sup>/h

## Technical Specifications

Filter model	4"S	6"	6"S	8"
Inlet/Outlet diameter [mm]	100	150	150	200
Maximum flow rate [m <sup>3</sup> /h]	80	160	160	300
Max. working pressure [bar]	10	10	10	10
Max. temperature [°C]	90	90	90	90
Filter area [cm <sup>2</sup> ]	2740	2740	5720	5720


Filter area: Total area exposed to flow and takes part in the filtering process.

## Construction Materials


Housing:	Phosphate pre-treated steel 37-2 with polyester coating.*
Lid:	SMC polyester
Bolts and Nuts:	Galvanized steel*
Seals:	Nitril rubber
Filter Elements:	
1. <b>Perforated Cylinder</b>	
Cylinder:	Stainless steel 316
Seals:	Nitril rubber
2. <b>Weavewire Screen</b>	
Screen:	Stainless steel 316
Seals:	Nitril rubber

\* Also available in stainless steel 316

## Pressure Loss Graphs

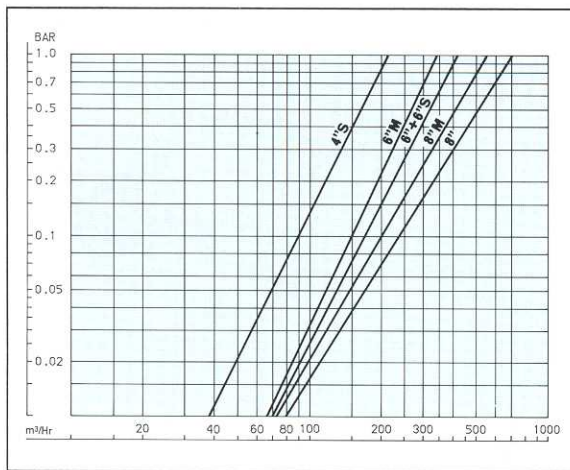


## How to Order

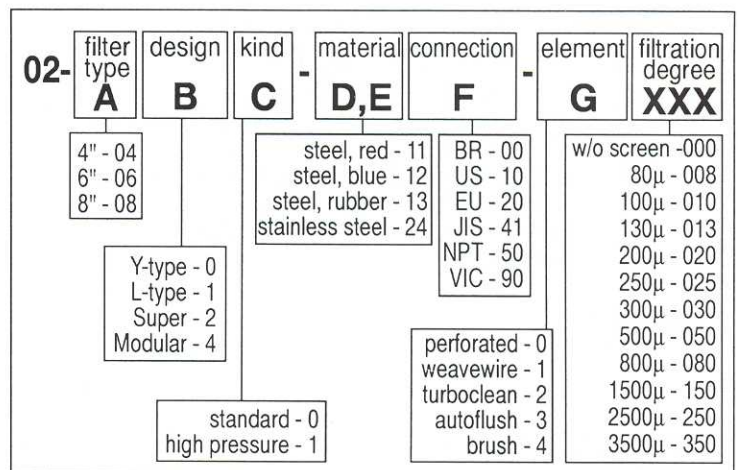


## Filtration Degrees

Code	Perforated Cylinder					Weavewire Screen				
	Brown	Purple	Orange	Grey	Green	Blue	White	Red	Yellow	Black
Micron	3500	2500	1500	800	500	300	200	130	100	80
MM	3.5	2.5	1.5	0.8	0.5	0.3	0.2	0.13	0.1	0.08
Mesh	4	6	10	20	30	50	75	120	155	200

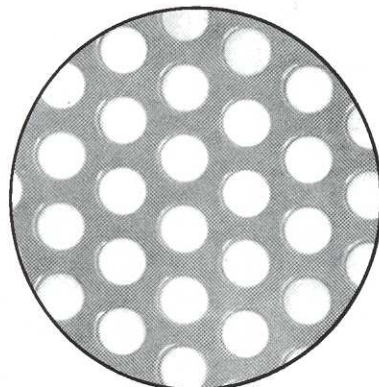




Perforated Cylinder

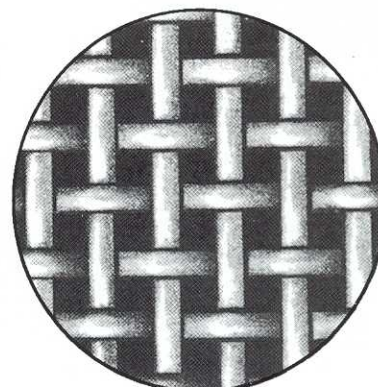

Weavewire Screen

## Dimensions and Weight

Filter Size	Filter Model	Cat. No.	Weight [kg]	Dimensions [mm]					Drg. No.
				A	B	C	D	E	
100 mm	4"S (In-line)	02-042	38	800	–	1200	594	650	1
150 mm	6" (In-line)	02-060	43	750	762	1090	576	750	1
150 mm	6"S (In-line)	02-062	56	750	1130	1910	860	1200	1
150 mm	6"S (Modular)	02-064	60	620	1450	2270	410	–	2
200 mm	8" (In-line)	02-080	65	750	1180	1950	880	1270	1
200 mm	8" (Modular)	02-084	76	620	1605	2500	475	–	2

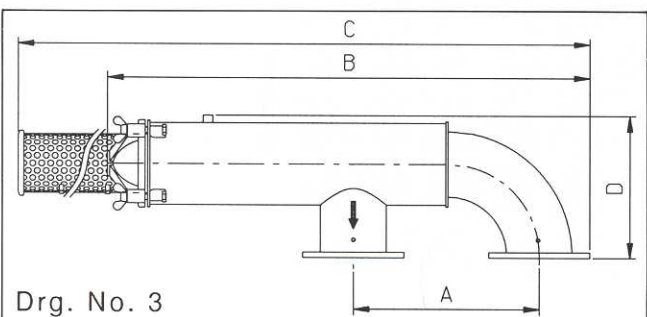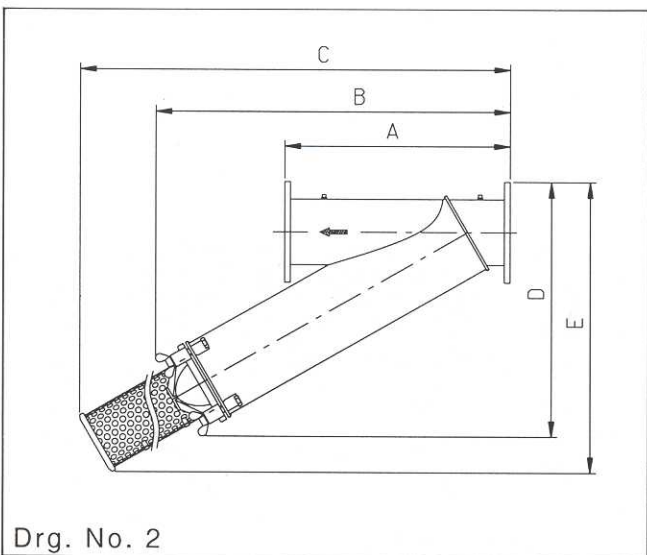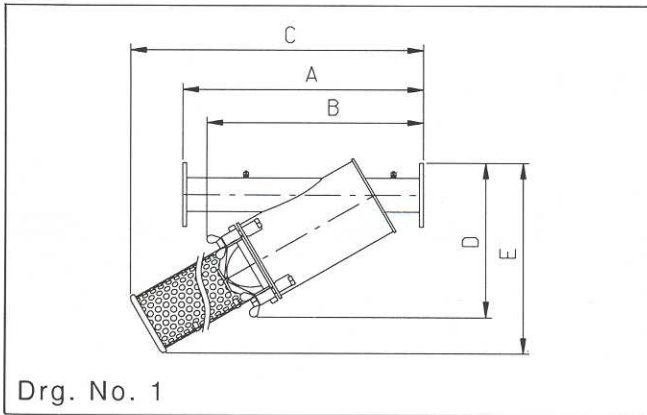



# 10" - 14" Steel Filters for Flow Rates up to 1000 m<sup>3</sup>/h

## Technical Specifications

Filter model	10"	12"	14"
Inlet/Outlet diameter [mm]	250	300	350
Maximum flow rate [m <sup>3</sup> /h]	500	650	1000
Max. working pressure [bar]	10	10	10
Max. temperature [°C]	90	90	90
Filter area [cm <sup>2</sup> ]	11440	17160	22880
Weight [kg]	191	280	365


Filter area: Total area exposed to flow and takes part in the filtering process.

## Construction Materials


Housing:	Phosphate pre-treated steel 37-2 with polyester coating.*
Lid:	SMC polyester
Bolts and Nuts:	Galvanized steel*
Seals:	Nitril rubber
Filter Elements:	
1. <b>Perforated Cylinder</b>	
Cylinder:	Stainless steel 316
Seals:	Nitril rubber
2. <b>Weavewire Screen</b>	
Screen:	Stainless steel 316
Seals:	Nitril rubber

\* Also available in stainless steel 316

## Pressure Loss Graphs

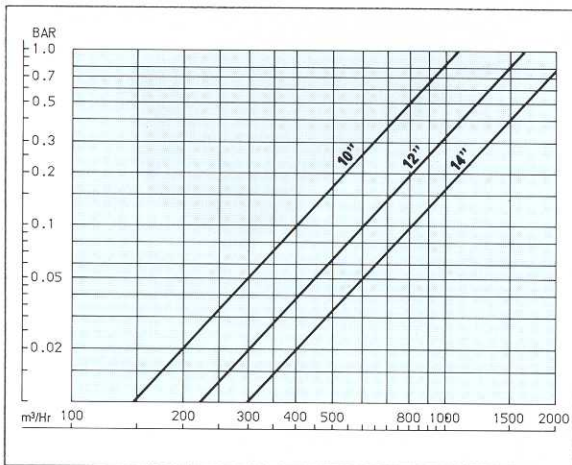


## How To Order

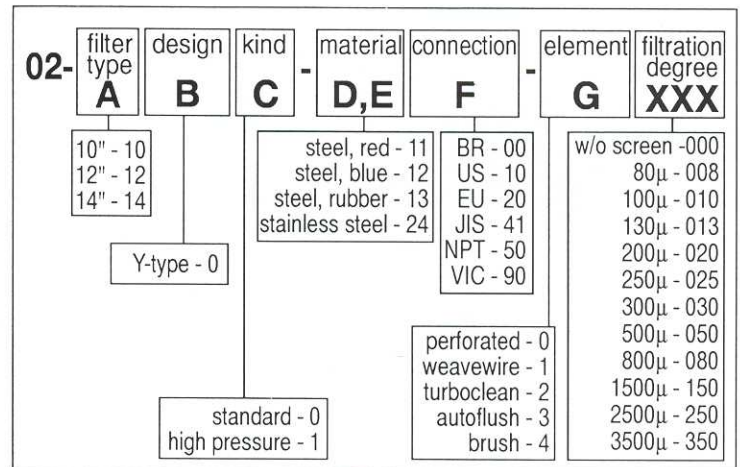


## Filtration Degrees

Code	Perforated Cylinder					Weavewire Screen				
	Brown	Purple	Orange	Grey	Green	Blue	White	Red	Yellow	Black
Micron	3500	2500	1500	800	500	300	200	130	100	80
MM	3.5	2.5	1.5	0.8	0.5	0.3	0.2	0.13	0.1	0.08
Mesh	4	6	10	20	30	50	75	120	155	200

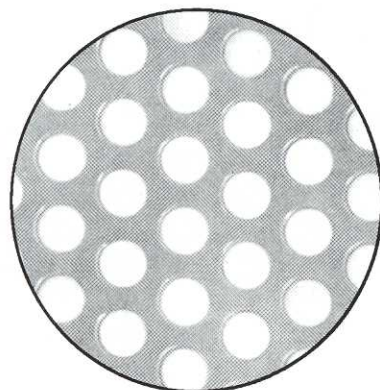





Perforated Cylinder

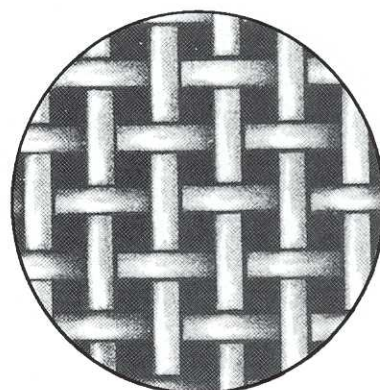

Weavewire Screen

## Dimensions

The dimensions in this view are the same for all following filter types.

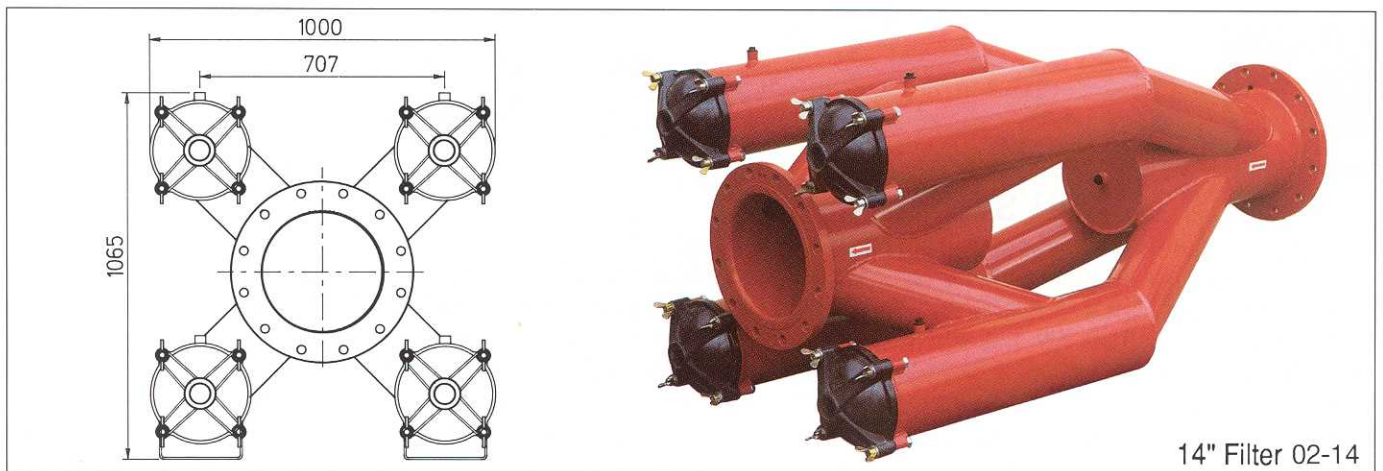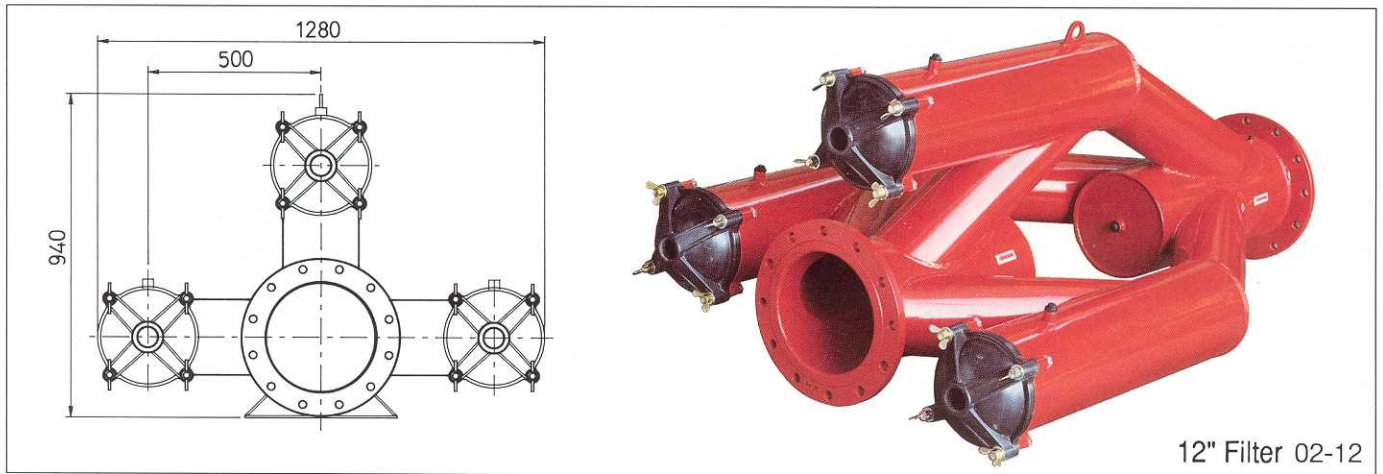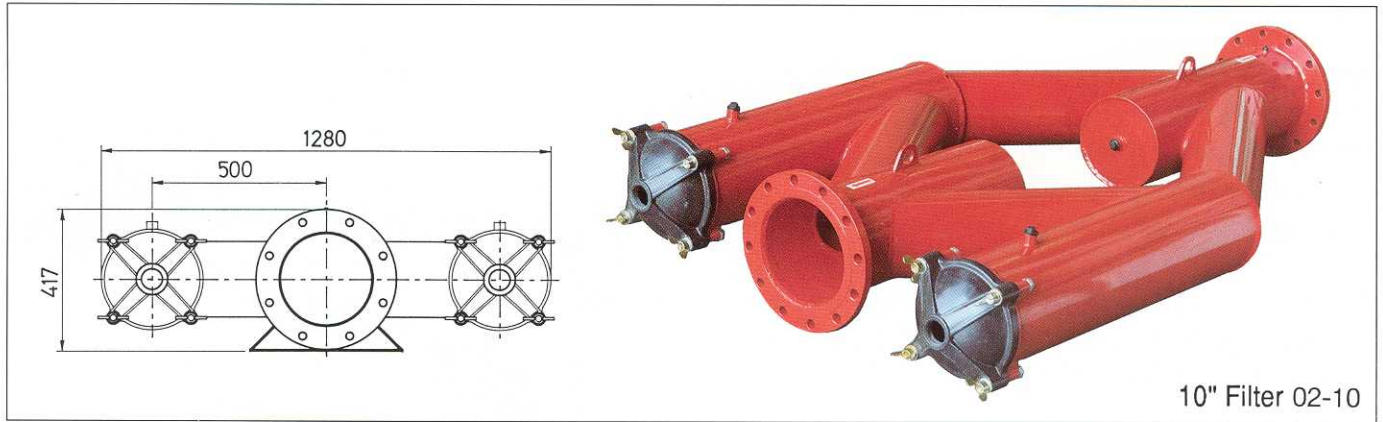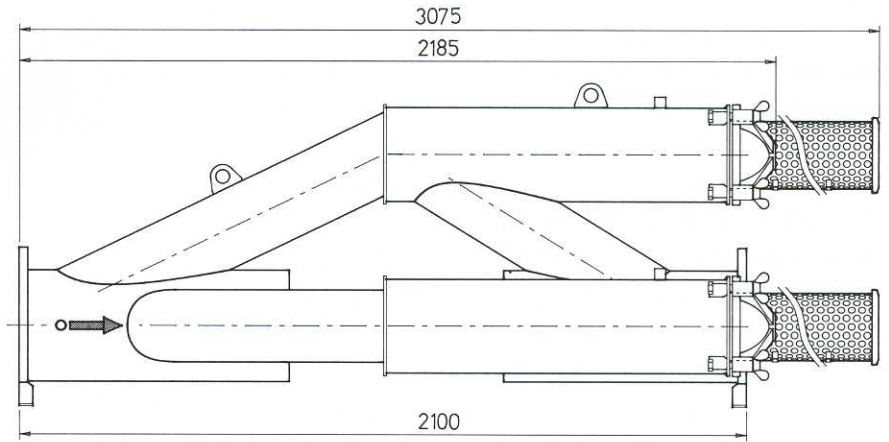



# Automatic and Semi-automatic Cleaning

## TURBOCLEAN

A revolutionary solution for non-stop filtration: Particles are pushed to the debris area, and the filter screen remains clean at all times.


The Turboclean consists of an Amiad screen cylinder with a Torpedo inserted inside the screen. The Torpedo is a static hydrodynamic device which fills most of the space inside the screen cylinder, creating high velocity along the screen, thus preventing particles from remaining on it. Periodical opening of the drain port will release the dirt from the debris area without the need to open the filter for cleaning.



8" Turboclean

## AUTOFLUSH

Automatic flushing of Turboclean filters: The Autoflush filters are supplied with a hydraulic flushing valve that opens automatically by means of an electronic timer. The electronic timer allows determination of the flushing duration and the flushing intervals. For filters with more than one flushing valve and for multi units, Amiad offers modular timers which can be used for two or more filters operated in sequence.

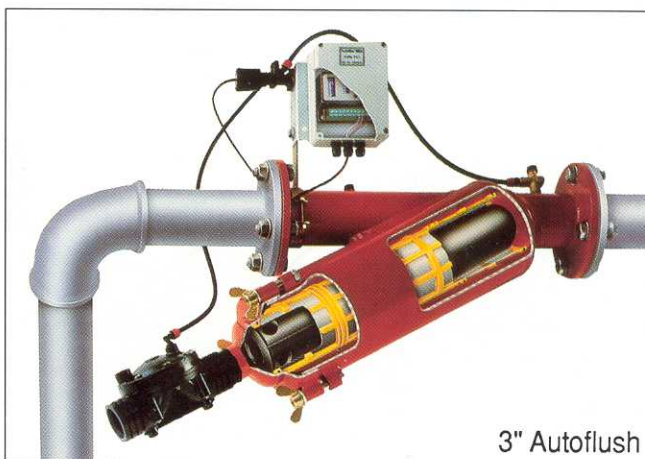

3" Autoflush

## BRUSHAWAY

For Semi-Automatic cleaning of 4"-14" filters.

The unit is made of nylon brushes, on a stainless steel frame, which is threaded into the filter lid and the brush assembly is then inserted inside the stainless steel screen.

A simple handle, outside the filter lid, allows to brush away particles from the screen, and to expel out of the filter. Brushing is done during the filtering process without having to stop the water supply.



4" Brushaway



**amiad** filtration systems



AMIAD products undergo constant monitoring for quality control. The manufacturer reserves the right to incorporate changes and improvements in the product without prior notice.

Ref: 95-044-200-003/04.02

**Manufacturer and Head Office:** Amiad Filtration Systems (1997) Ltd.

D.N. Galil Elyon 1 • 12335 • Israel • Tel: +972-4-690-9500 • Fax: +972-4-690-9391 • E-Mail: mrkting@amiad.co.il

**North America:** Amiad Filtration Systems • 2220 Celsius, Unit B • Oxnard, CA. 93030 • USA • Tel: (805)988-3323 • Fax: (805)988-3313

**Australia:** Amiad Australia Pty. Ltd. • 3/15 Brisbane St. • Eltham • Victoria 3095 • Tel: 03-9439-3533 • Fax: 03-9439-1612

**Germany:** Amiad Filtration Systems • Gerstackerstr. 9 • D-20459 Hamburg • Germany • Tel: +49-40-3609-6770 • Fax: +49-40-3609-6765

**France:** Amiad France S.A.R.L. • 4-6, Boulevard Exelmans • 75016 Paris • France • Tel: +33-14-647-7679 • Fax: +33-14-647-6716

**South America:** Amiad Sur • Jose Ellauri 357/Of.803 • Montevideo CP 11300 • Uruguay • Tel: +598-2-711-0723 • Fax: +598-2-711-2469

**Singapore:** F.C.S. Pte. Ltd. • 111 North Bridge Road • #07-07 Peninsula Plaza • Singapore 179098 • Tel: +65-337-6698 • Fax: +65-337-8180