

O-Tif - Specifications

Revised : 01/2003

Item	Nominal FR (l/h)	Color Code	Cat No.
O-Tif 2	1.9	Brown	03260-0001
O-Tif 4	4	Black	03260-0002
O-Tif 8	7.7	Green	03260-0003
O-Tif 16	16.7	Violet	03260-0004



Operating pressure range : 0.8-2.0 bar


Installation : Use 2mm punch tool

O-Tif - Flow Rate Vs. Pressure


	Color Code			
	Brown	Black	Green	Violet
Pressure (m)	Flow rate (l/h)			
	2	4	8	16
2	0.88	2	3.3	6.9
4	1.26	2.60	4.80	10.40
6	1.52	3.20	5.95	12.80
8	1.74	3.60	6.90	14.90
10	1.92	4.00	7.70	16.70
12	2.07	4.40	8.40	18.30
14	2.23	4.70	8.95	19.80
16	2.37	4.90	9.50	21.10
18	2.50	5.20	10.20	22.30
20	2.62	5.40	10.50	23.30

Low Pressure (m)	Flow rate (l/h)			
	2	4	8	16
0.3	0.29			
0.4	0.39			
0.5	0.40			
0.6	0.47			
0.7	0.52			
0.8	0.52			
0.9	0.59			
1	0.62			
1.1	0.63			
1.2	0.68			
1.3	0.71			
1.4	0.72			
1.5	0.76			
1.6	0.77			
1.7	0.80			
1.8	0.81			
1.9	0.85			
2	0.88			

O-Tif - Performance curves Flow rate Vs. Pressure

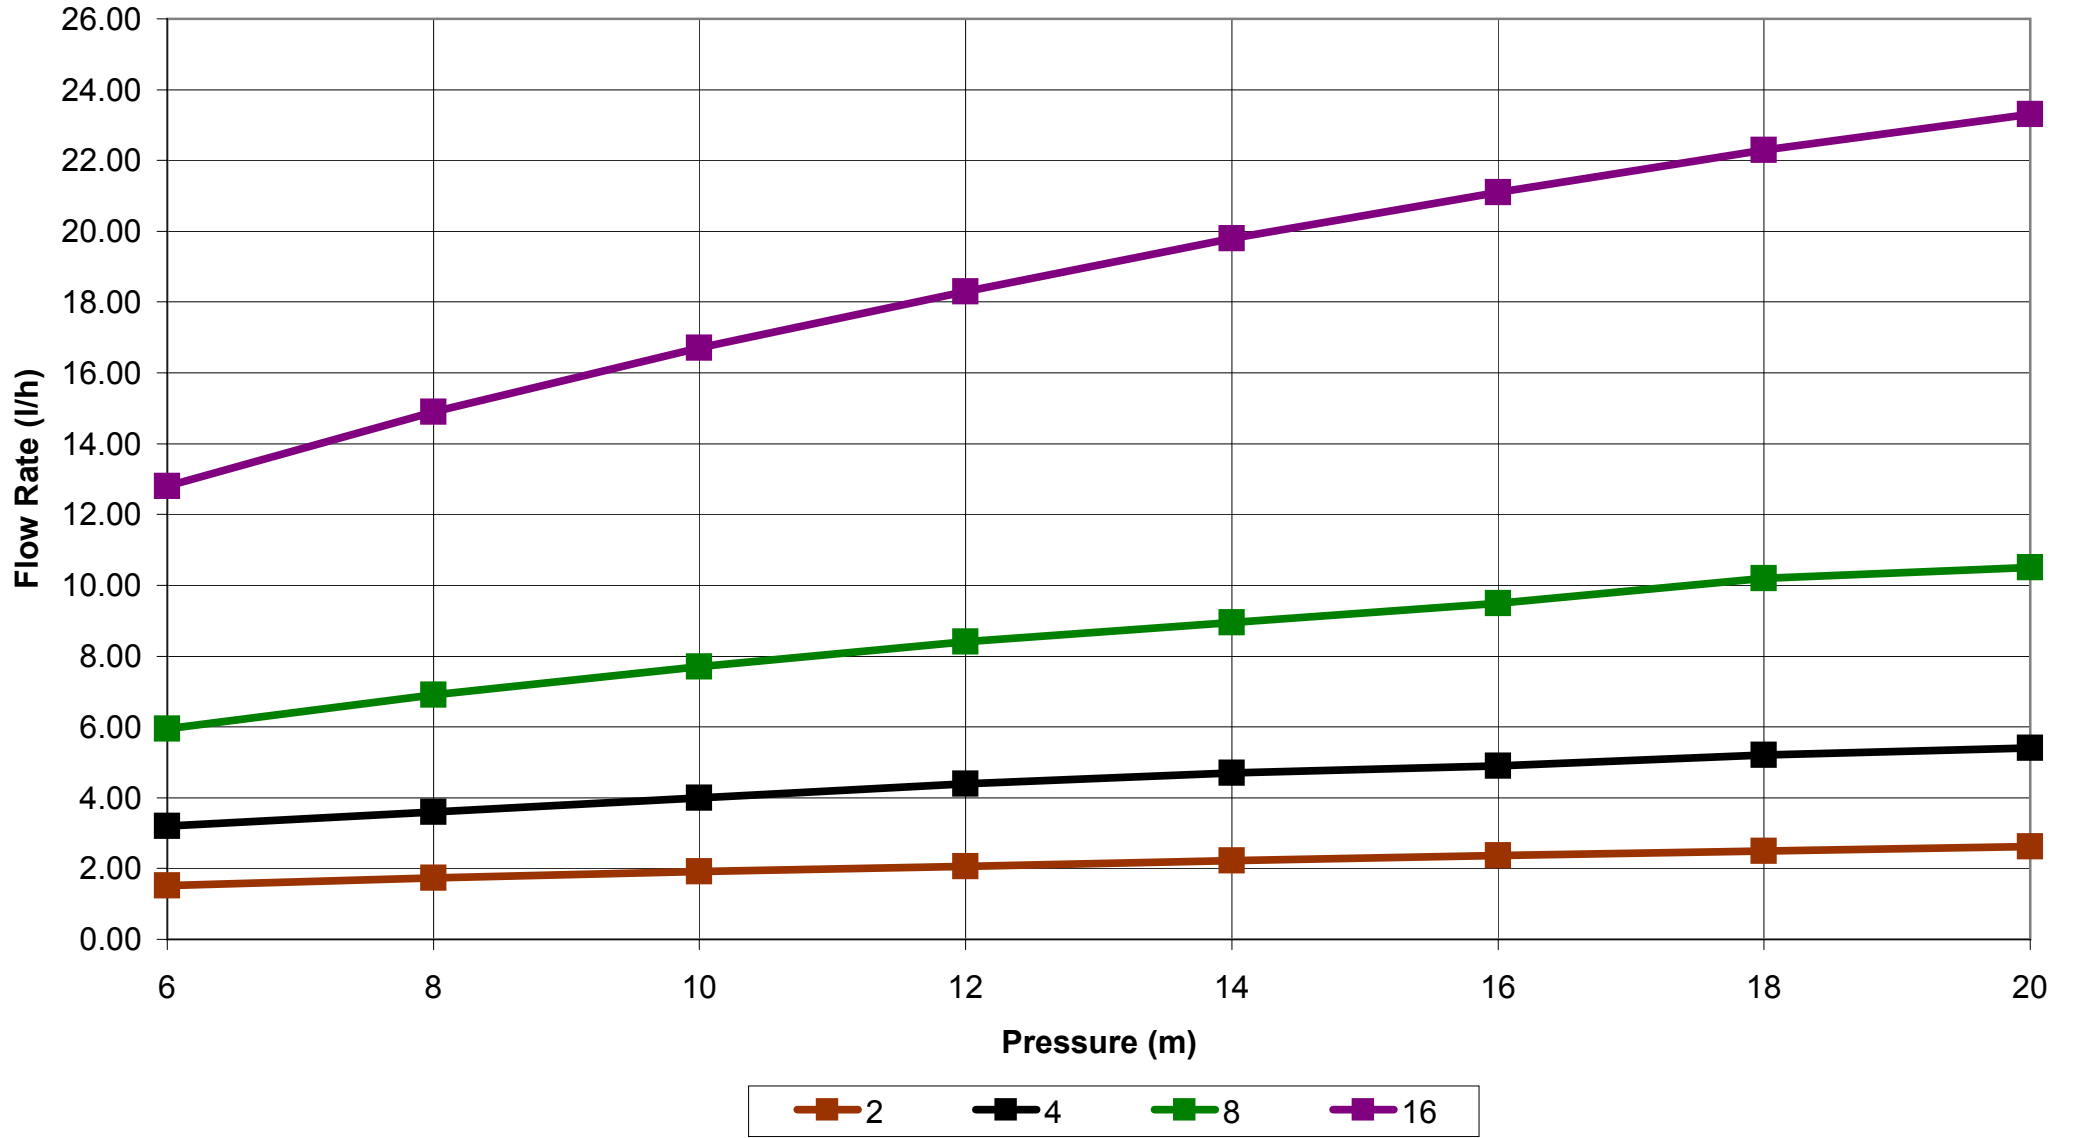

O-Tif - Performance curves Flow rate Vs. Low Pressure

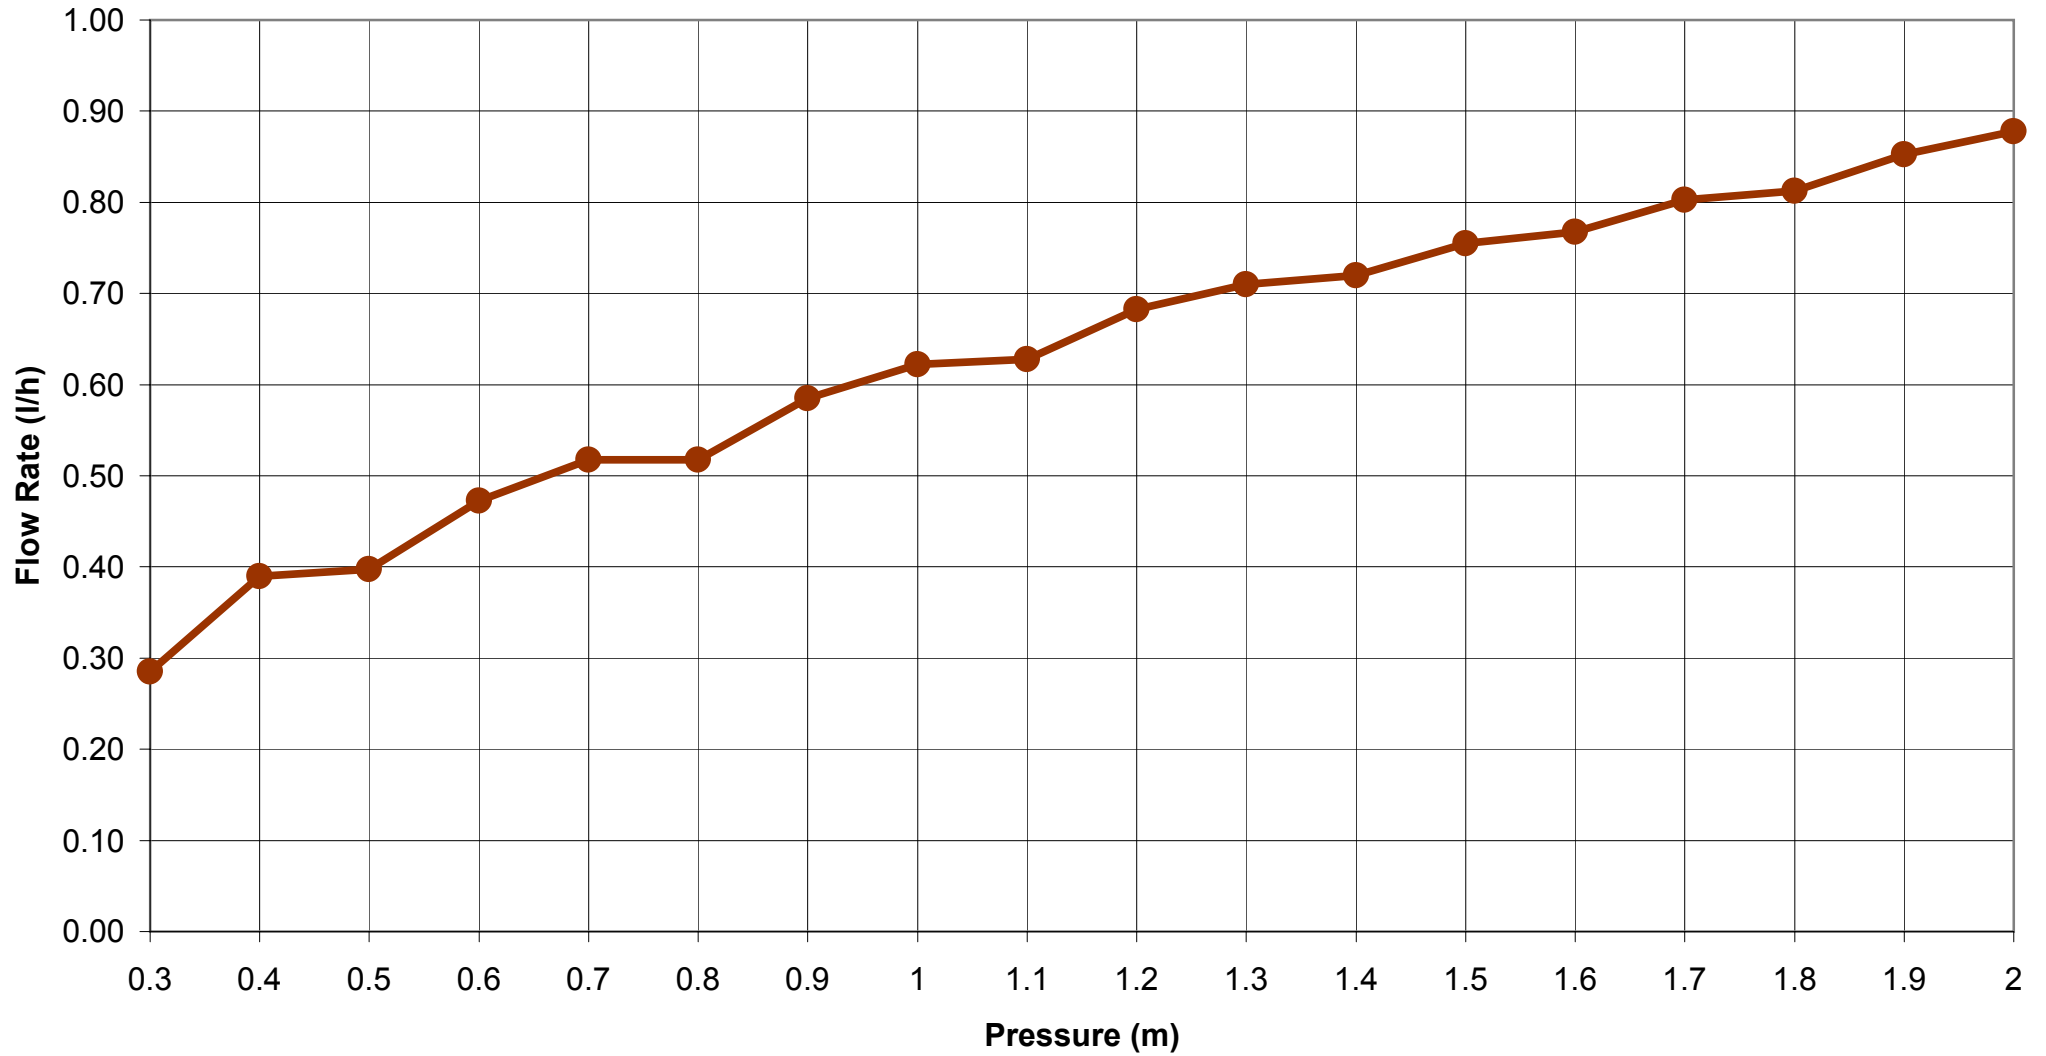

—●— 2