

TRAILCO[®]

T50 TRAVELLER

Ideally suited for watering:

- Golf Courses
- Sportsfields
- Gardens
- Parks
- Estates
- Turf areas
- Race Courses
- Turf Farms
- Small Crops
- Dust Control



**SIMPLE
STURDY
DESIGN
GIVES
OUTSTANDING
RELIABILITY AND PERFORMANCE**


TRAILCO T50

Capable of watering an area 120m long and 36m wide per run with no further attention.
Hose Size: 55m of 25mm (1inch)

SPRINKLER		TRAILCO T50 TRAVELLER															
		Nozzle Diameter		Sprinkler Pressure *		Output *		Wetted Width *		Full Circle Precipitation Rate (avg.)		Approx. area per 100m Run		Gross Application (7m/hr)		Pressure loss in hose	
		mm	ins	kPa	PSI	l.p.s	GPM	m	ft.	m mph	p.p.h	ha	Ac	mm	ins	kPa	PSI
NAAN 254/91 Plus Rotating Sprinkler Arm Jets	6.0	0.24	241	35	0.81	10.7	34	111	3.6	14	0.22	0.54	18.9	0.74	69	10	
			290	42	0.91	12.0	36	118	3.6	14	0.23	0.58	20.1	0.79	83	12	
			345	50	1.02	13.5	39	127	3.6	14	0.25	0.62	20.8	0.82	90	13	
	6.3	0.25	241	35	0.86	11.3	34	111	3.8	15	0.22	0.54	20.1	0.79	76	11	
			290	42	0.96	12.7	36	118	3.8	15	0.23	0.58	21.2	0.83	83	12	
			345	50	1.07	14.1	39	127	3.6	14	0.25	0.62	21.8	0.86	117	17	
	7.0	0.28	241	35	0.99	13.1	36	118	3.8	15	0.23	0.58	21.8	0.86	90	13	
			290	42	1.10	14.5	38	124	3.8	15	0.25	0.61	23.0	0.91	117	17	
			345	50	1.24	16.3	40	131	4.1	16	0.26	0.64	24.5	0.97	152	22	
	7.5	0.30	241	35	1.11	14.7	36	118	4.3	17	0.23	0.58	24.5	0.97	117	17	
			290	42	1.25	16.4	38	124	4.3	17	0.25	0.61	26.1	1.03	152	22	
			345	50	1.37	18.1	40	131	4.3	17	0.26	0.64	27.2	1.07	172	25	

NOTE:- APPROXIMATE LANE SPACINGS CALCULATED USING 0.65 WIND FACTOR, (65% OF THE WETTED WIDTH/SPRINKLER DIAMETER)

* Sprinkler performance is based on the manufacturers data which has been obtained under ideal test conditions and may be adversely affected by wind or other factors. Trailco Irrigation makes no representation regarding droplet condition, uniformity or application rate.

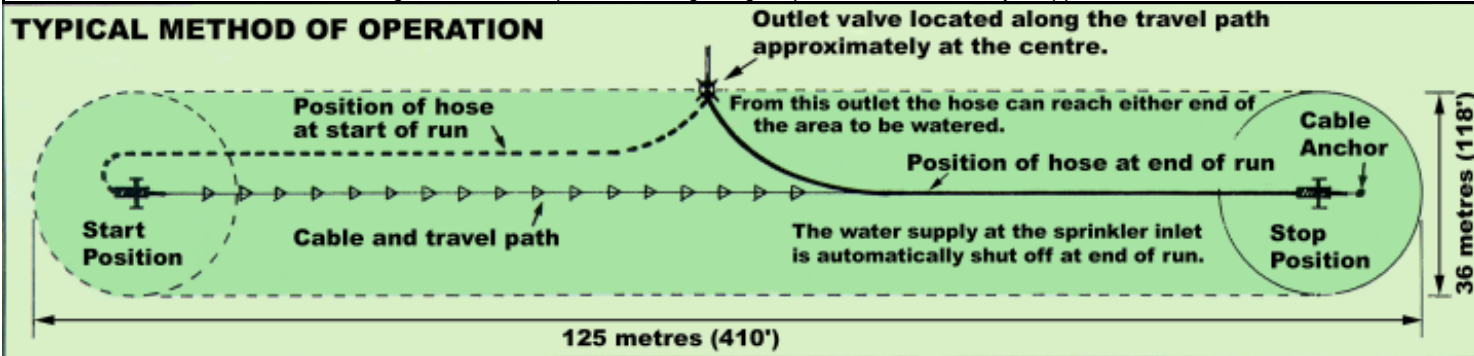

Hose Size: 25mm (1") x 55 metres (180') Hose


Cable Length: 90 metres (295')

FEATURES:

- Drive Unit - Powered by rotating sprinkler arms through a gear train and worm drive to cable drum. Simple and efficient.
- Travel Speed Adjustment – A simple operation by varying the angle of the rotating sprinkler arm jets and available pressure.
- Automatic Shut-off – The water supply at the sprinkler is automatically shut off at end of run.
- Longer Life – Gears are made of gunmetal and the chassis is hot dip galvanised.
- Cable Rewind Handle – For easy cable retrieval on an aborted run.
- All brass sprinkler and range of nozzle sizes.
- Cable anchor stake supplied with Traveller as standard.
- Cover protecting drive mechanism.
- Folding handle allows easy repositioning of Traveller.
- Easy to service.

**Ideally suited for watering: Golf Courses
Sportsfields, Gardens, Parks, Estates, Turf
areas, Race Courses, Turf Farms, Small
Crops, Dust Control.**

SHIPPING DIMENSIONS

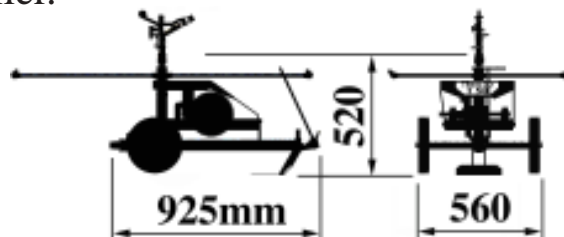

SOLD AND SERVICED BY:

TRAILCO IRRIGATION (AUST.)

ABN 35 480 117 190

1289 KINGSFORD SMITH DRIVE
PINKENBA QLD. 4008

Phone (07) 3260 1828 Fax (07) 3260 1877

International Callers: Country (61) Area (7)

www.trailco.com.au sales@trailco.com.au



Trailco's policy is to constantly improve; therefore changes to specifications may be made without notice.