

GyroNet™ UD

Up-side Down

Applications:

For application where sprinklers are mounted inverted to keep the ground clear and prevent damage to the sprinklers by harvesters and machinery.

Specifications:

Special designed up side down rotor

Flow regulated sprinkler , 3 different flow rates :
40,58,70 l/h.

Maximum recommended working pressure : 2.5 bar

2 types of inlet connectors :

- Self tapping
- Press fit

Upper bearing

A specially designed spring bearing keeps the anti-ant feature even when the sprinkler is mounted in an up side down position.

The rotor is colored Green

Features and Benefits:

- Anti-ant mechanism prevents insect penetration into the area of the sprinklers nozzle.
- Micro-sprinkler made of plastic materials resistant to all agrochemicals & weather conditions.
- Specially designed for fruit trees, orchards, deciduous and other tree crops.
- Can be used in Frost fighting and/or Cooling irrigation systems.
- Long-term reliable service:
Simple, modular parts.



GyroNet™ UD

Up-side Down

Performance Data

Model	Nozzle Code color	Nozzle size (mm.)	K	X	Maximum working pressure (bar)	Wetted diameter (m.) UD 50 cm. above ground	Swivel (rotor) Code color
40	Blue	0.90	9.4	0.5	2.5	5.5	Green
58	Gray	1.10	13.5	0.5	2.5	7.0	Green
70	Black	1.20	17.4	0.5	2.5	7.0	Green


Packaging Data

GyroNet™ UD	Quantity p/box units	Box size cm x cm x cm	Box weight kg	Boxes p/pallet	Total units p/pallet	Pallet weight kg.
Head only	700	16x40x45	11.0	36	25200	404
Complete stand (60 cm.) w/o stake	200	18x34x79	6.8	20	4000	144
Complete stand (90 cm.) w/o stake	150	16x35x106	7.8	18	2700	149

GyroNet™ UD

Flowchart to determine the desired product definition

How to use: To determine the desired product definition select one of every set of options displayed on the chart.

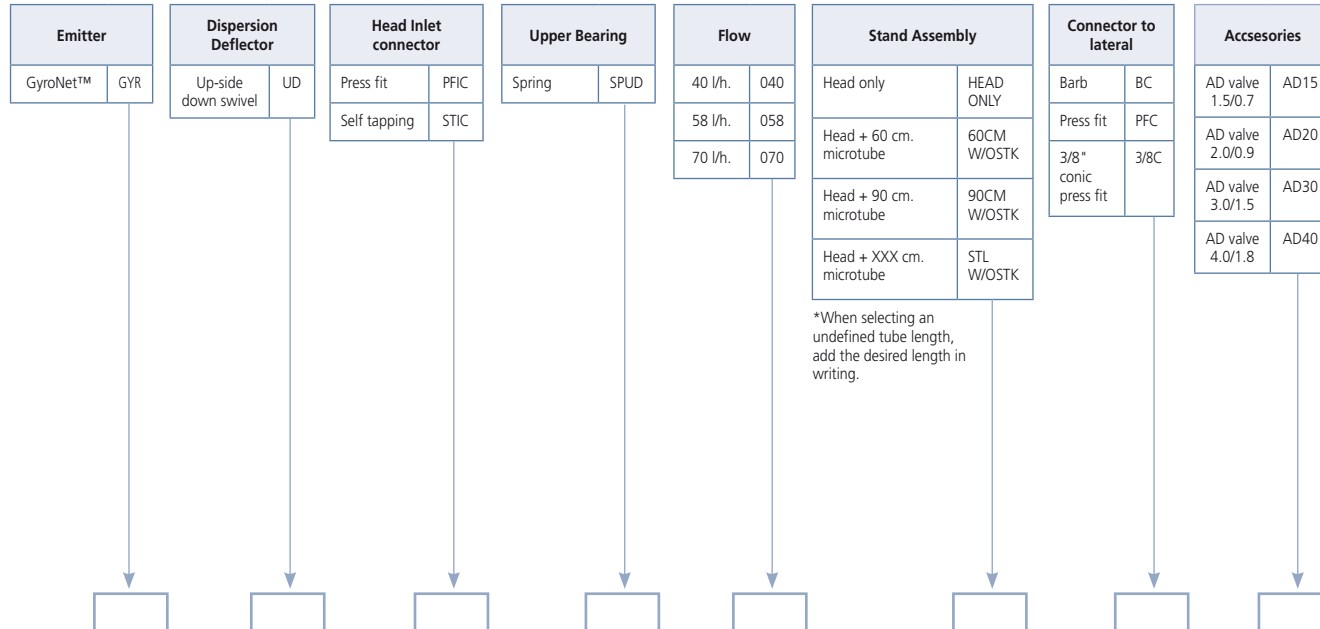

For further information/ clarification contact the Netafim™ Technical department.